


FLAT BELT CONVEYING SYSTEMS

The Quantum CONV 4 Series conveying systems feature cantilevered stainless steel construction and utilize USDA compliant, reinforced, urethane belting. Super sanitary design with no tools needed for disassembly minimizes cleaning time. Quantum has a full line of standard conveyors that are easily adaptable to existing systems. Custom lengths and widths are also available to fit any conveying need.

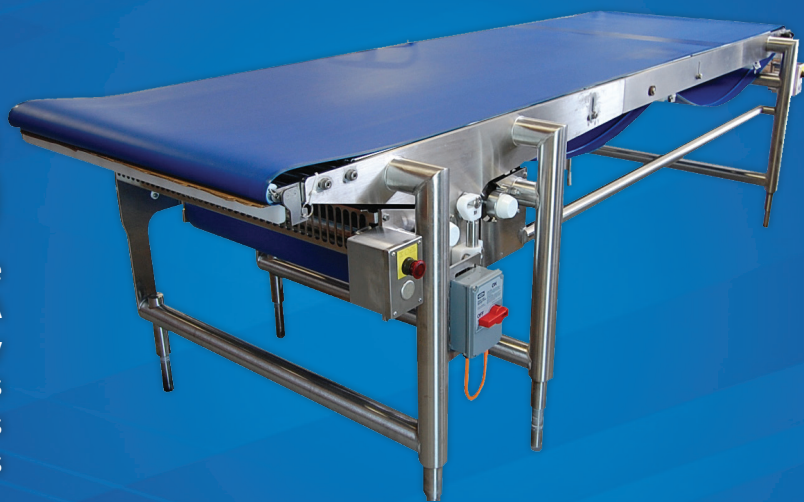

CONV 4 SERIES

SPECIFICATIONS

BELTS:

USDA Compliant
V-Guide For Easy Tracking
Flat, Cleated, or Textured Available

DRIVE SYSTEM:

Power Drive Roller Driven

UTILITY REQUIREMENTS:

200-240 VAC., 3 Phase 5 Amp Circuit 50-60 Hz.
Other Voltages Available

PRODUCTION RATES:

Variable Speed: Up to 100 Feet Per Minute

OPTIONS:

Roller Transfer Section
Lane Guides





FEATURES:

- ✓ Cantilevered Design
 - ✓ Heavy Duty Stainless Steel Construction
 - ✓ Easy Access to Conveyor Side
 - ✓ Center Driven
 - ✓ Variable Speed
 - ✓ Low Profile Conveyor Bed
 - ✓ Lengths Available to 12 Feet
 - ✓ Continuous Sanitary Welds
 - ✓ No Tools Required For Sanitation
 - ✓ Wash Down Compatible
 - ✓ Blade Style UHMW Belt Scraper
 - ✓ Adjustable Stainless Steel Feet, No Exposed Threads
 - ✓ No Tool Belt Removal
 - ✓ Solid Round Bar Construction
- With Minimal Flat Surfaces



QUANTUM®

WWW.Q-T-S.COM

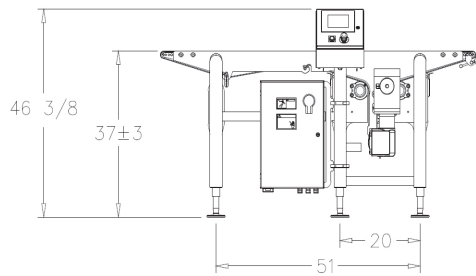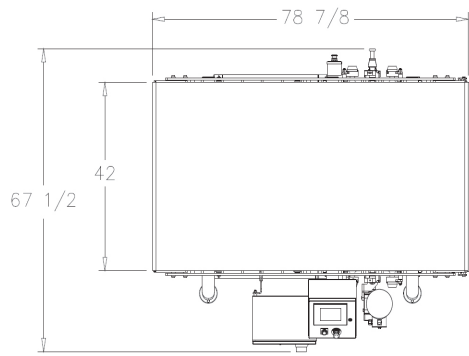

UHMW Belt Scraper




Solid Round Bar Construction
With Minimal Flat Surfaces



Optional Lane Guides




Guarded Rollers



Easy Belt Tensioning



Center Driven



Adjustable Stainless Steel Feet
No Exposed Threads

QUANTUM®

PORTION & APPLY

TOP IT | FILL IT | SLICE IT

CONTACT US: +1 815.464.1540
INFO@Q-T-S.COM | WWW.Q-T-S.COM
U.S.A.